

Einspeichung mit 3-fach Kreuzung  
 Speichen= Naben=  
 paar flansch(1) Felge  
 Pos. 4 Loch-Nr. Loch-Nr.  
 4.1+4.2 -- 1 + 6 -- 4 + 2  
 4.3+4.4 -- 3 + 8 -- 8 + 6  
 4.5+4.6 -- 5 + 10 -- 12 + 10  
 4.7+4.8 -- 7 + 12 -- 16 + 14  
 4.9+4.10 -- 9 + 14 -- 20 + 18  
 4.11+4.12 -- 11 + 16 -- 24 + 22  
 4.13+4.14 -- 13 + 18 -- 28 + 26  
 4.15+4.16 -- 15 + 2 -- 32 + 30  
 4.17+4.18 -- 17 + 4 -- 36 + 34  
 Speichen= Naben=  
 paar flansch(2) Felge  
 Pos. 3 Loch-Nr. Loch-Nr.  
 3.1+3.2 -- 1 + 6 -- 3 + 1  
 3.3+3.4 -- 3 + 8 -- 7 + 5  
 3.5+3.6 -- 5 + 10 -- 11 + 9  
 3.7+3.8 -- 7 + 12 -- 15 + 13  
 3.9+3.10 -- 9 + 14 -- 19 + 17  
 3.11+3.12 -- 11 + 16 -- 23 + 21  
 3.13+3.14 -- 13 + 18 -- 27 + 25  
 3.15+3.16 -- 15 + 2 -- 31 + 29  
 3.17+3.18 -- 17 + 4 -- 35 + 33  
 Jedes Paar besteht aus je einer  
 Außen- und Innenspeiche


Lacing with 3-way intersection  
 pair of hub of  
 spokes flange(1) rim  
 item 4 hole no. hole no.  
 4.1+4.2 -- 1 + 6 -- 4 + 2  
 4.3+4.4 -- 3 + 8 -- 8 + 6  
 4.5+4.6 -- 5 + 10 -- 12 + 10  
 4.7+4.8 -- 7 + 12 -- 16 + 14  
 4.9+4.10 -- 9 + 14 -- 20 + 18  
 4.11+4.12 -- 11 + 16 -- 24 + 22  
 4.13+4.14 -- 13 + 18 -- 28 + 26  
 4.15+4.16 -- 15 + 2 -- 32 + 30  
 4.17+4.18 -- 17 + 4 -- 36 + 34  
 pair of hub of  
 spokes flange(2) rim  
 item 3 hole no. hole no.  
 3.1+3.2 -- 1 + 6 -- 3 + 1  
 3.3+3.4 -- 3 + 8 -- 7 + 5  
 3.5+3.6 -- 5 + 10 -- 11 + 9  
 3.7+3.8 -- 7 + 12 -- 15 + 13  
 3.9+3.10 -- 9 + 14 -- 19 + 17  
 3.11+3.12 -- 11 + 16 -- 23 + 21  
 3.13+3.14 -- 13 + 18 -- 27 + 25  
 3.15+3.16 -- 15 + 2 -- 31 + 29  
 3.17+3.18 -- 17 + 4 -- 35 + 33  
 Each pair consists of one  
 Outdoor and indoor storage

6	1	sprocket Z20	SG-S501	Shimano
5	1	spoke nipples	Messing Nippel	Dt Swiss
4.9	1	Spoke outboard-hub(1)9-rim20	"	"
3.5	1	Spoke outboard-hub(2)5-rim11	"	"
3.4	1	Spoke on the inside-hub(2)8-rim5	"	"
3.3	1	Spoke outboard-hub(2)3-rim7	"	"
3.2	1	Spoke on the inside-hub(2)6-rim1	"	"
3.1	1	Spoke outboard-hub(2)1-rim3	"	"
2	1	26"-rim	YAK 19 559-19	Schürmann
1	1	8-speed-hub	SG-S501	Shimano



BOM: 26er rear wheel with rim brakes

Pos	Qty	Part Name	Type	Maker
-----	-----	-----------	------	-------

USE RANGE	TOLERANCE	SURFACE	ARCHIVE MATERIAL	SCALE 1:2
	DATE	NAME	DESCRIPTION	
	DRAWN 03.01.2012	U. Klöse	26er-Hinterrad mit Felgenbremse	
	APPR.		26er rear wheel with rim brakes	
	RLS.			
			DRAWING-NUMBER	SHEET
			A3-GR-0012-001	2
				OF 3
INDEX DESCRIPTION	DATE	NAME ORIGINAL	LEXCHF.	LEXCH.TH.

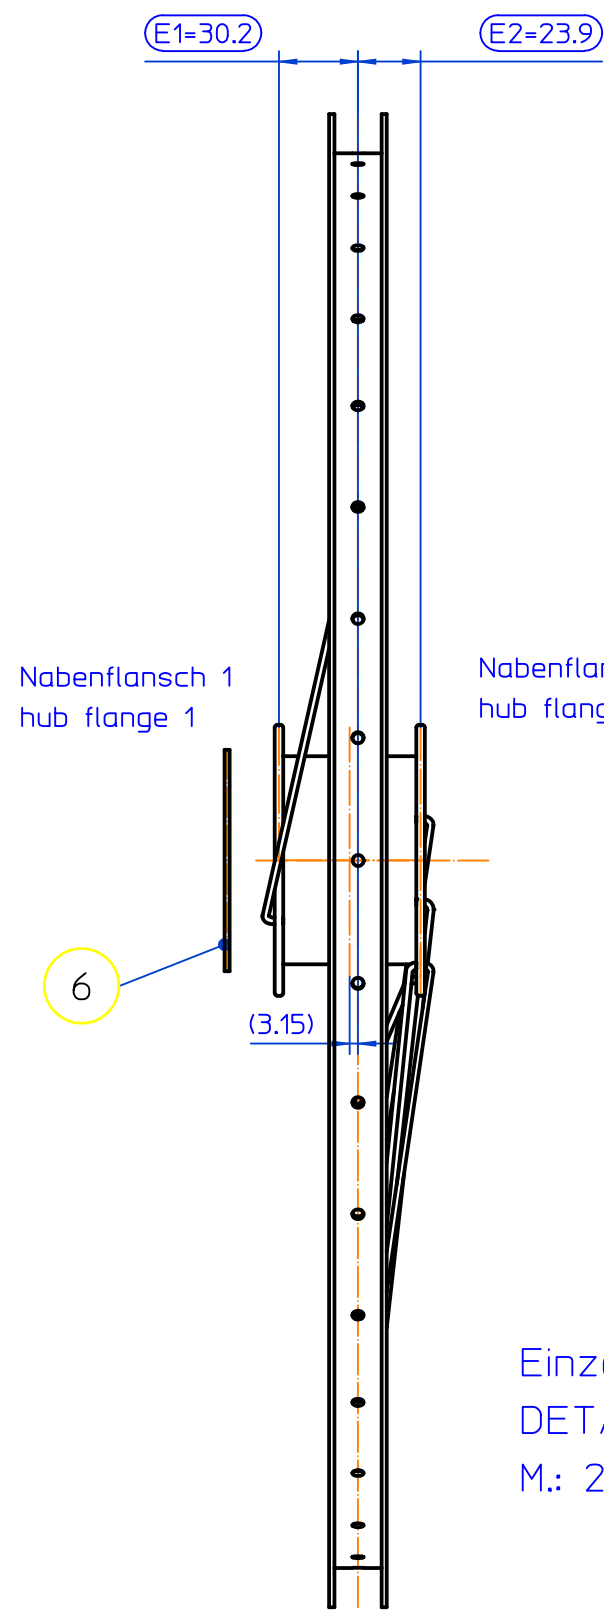

Einzelheit W  
DETAIL W  
M.: 2:1

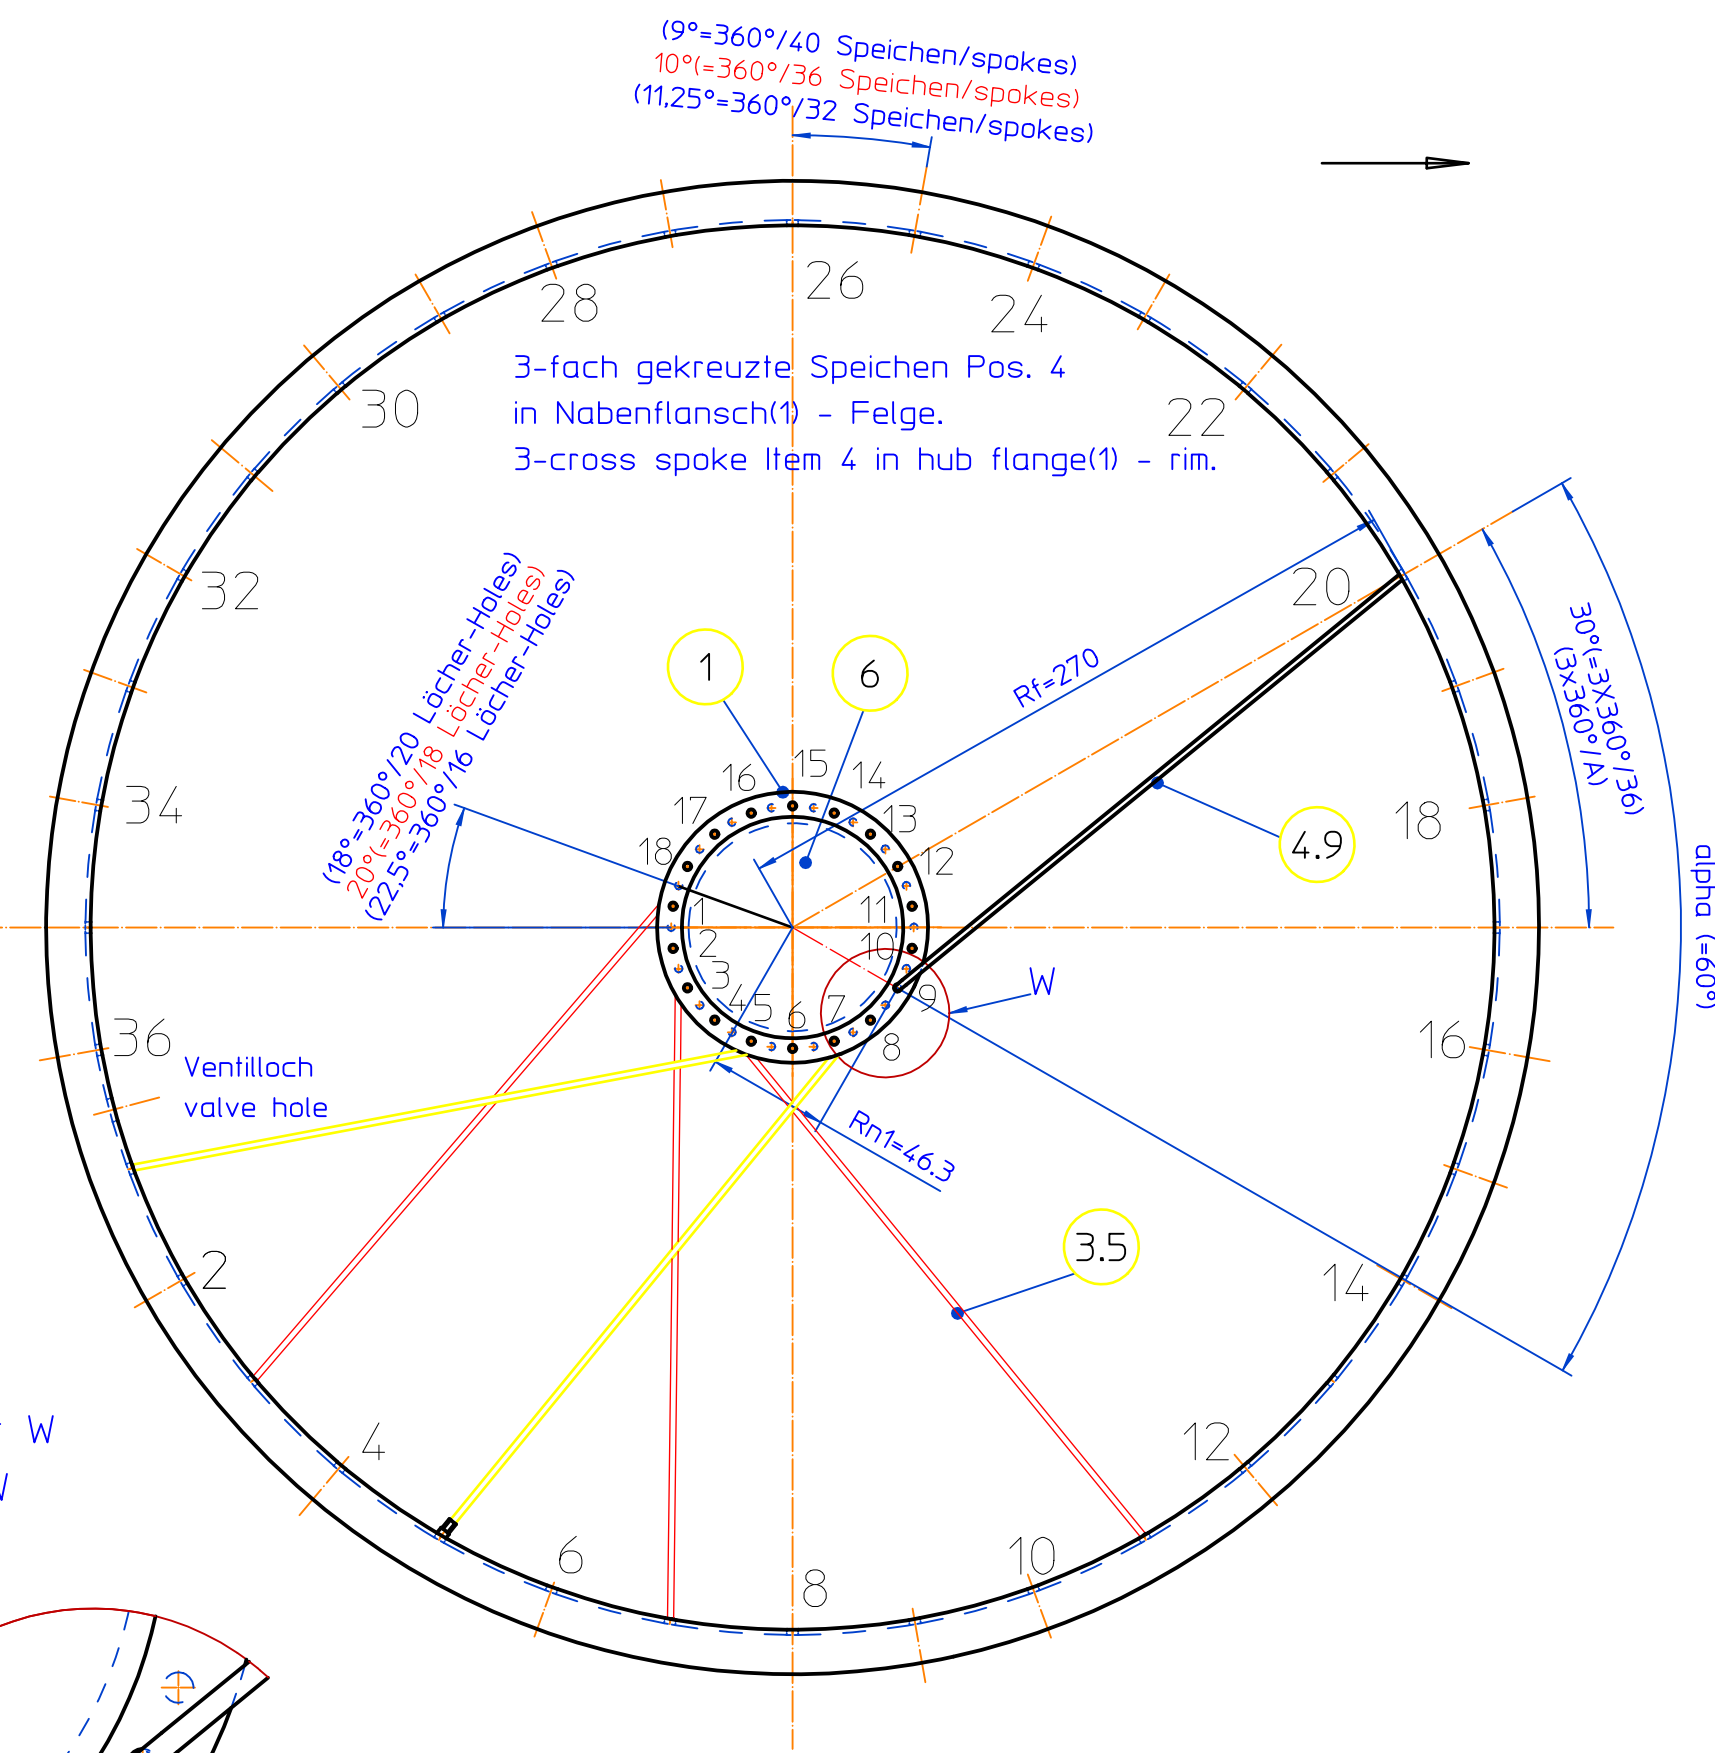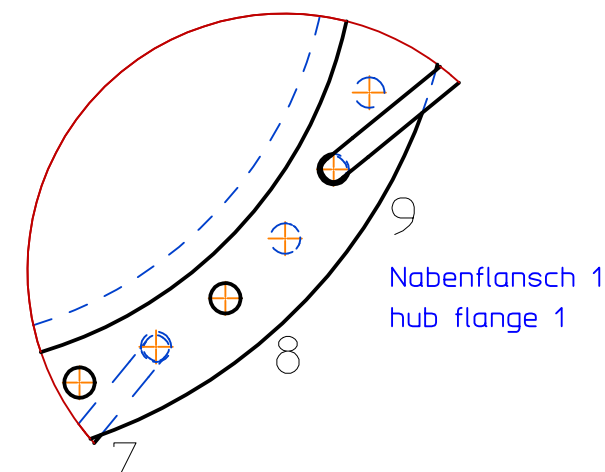

USE RANGE	TOLERANCE	SURFACE	ARCHIVE	SCALE 1:2
			MATERIAL	
	DATE	NAME	DESCRIPTION	
	DRAWN 03.01.2012	U. Klose	26er-Hinterrad mit Felgenbremse	
	APPR.		26er rear wheel with rim brakes	
	RLS.			
			DRAWING-NUMBER	SHEET
			A3-GR-0012-001	3
				OF 3
INDEX DESCRIPTION	DATE	NAME ORIGINAL	LEXCHF.	LEXCH.TH.